



PCT/GB 2002 / 003047



INVESTOR IN PEOPLE

BEST AVAILABLE COPY


The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

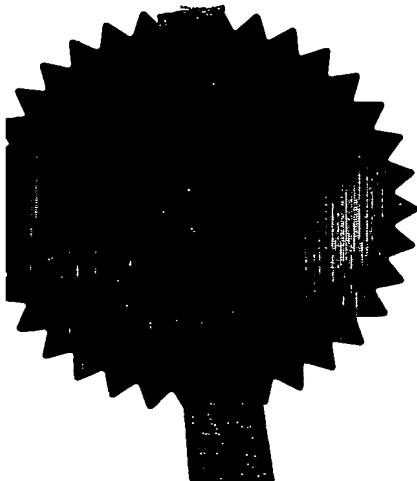

Signed


Andas Gersey

Dated

16 December 2002

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

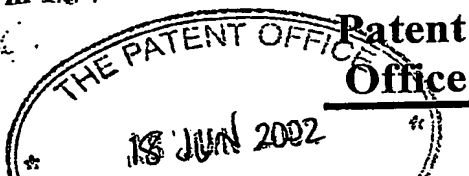

Patent Office

Request for grant of a patent

See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

19JUN02 E726698-2 D02882

R01/7700 0.00-0213981.4

The Patent Office

Concept House
Cardiff Road
Newport
South Wales NP10 8QQ

1.	Your reference	MJD/57907/300		
2.	Patent application number (The Patent Office will fill in this part)	0213981.4		18 JUN 2002
3.	Full name, address and postcode of the or of each applicant (underline all surnames)	KEYMED (MEDICAL & INDUSTRIAL EQUIPMENT) LTD KEYMED HOUSE STOCK ROAD SOUTHEAD-ON-SEA ESSEX SS2 5QH Patents ADP number (if you know it) 548594001 If the applicant is a corporate body, give the country/state of its incorporation UNITED KINGDOM		
4.	Title of the invention	A DUMMY MEDICAL INSTRUMENT FOR USE IN A SIMULATOR		
5.	Name of your agent (if you have one)	BOULT WADE TENNANT		
	"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	VERULAM GARDENS 70 GRAY'S INN ROAD LONDON WC1X 8BT Patents ADP number (if you know it) 42001 ✓		
6.	If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day/month/year)
		UK	0200325.9	08/01/02
7.	If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day / month / year)	
8.	Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))	YES		

Patents Form 1/77

Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 6

Claim(s) 2

Abstract -

Drawing(s) 2 + 2 *dh*

10. If you are also filing any of the following, state how many against each item.

Priority documents -

Translations of priority documents -

Statement of inventorship and right to grant of a patent (Patents Form 7/77) -

Request for preliminary examination and search (Patents Form 9/77) 1 *dh*

Request for substantive examination (Patents Form 10/77) -

Any other documents (Please specify) -

11

I/We request the grant of a patent on the basis of this application.

Signature

Date

Bonnie Wade Perrett

18 June 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

Martyn J. Draper
020 7430 7500

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 01645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

DUPLICATE

-1-

A DUMMY MEDICAL INSTRUMENT FOR USE IN A SIMULATOR

5 The present invention relates to a dummy medical instrument for use in a simulator.

10 One type of simulator to which the present invention is applicable is that disclosed in GB A 2252656. This simulator simulates the operation of an endoscopic process. A dummy endoscope is insertable into a fixture which is provided with a sensor mechanism to sense the longitudinal and rotational movement of the dummy endoscope. This information is fed to a controller which generates force feedback information based on virtual model data held in the computer memory. The force feedback applied to the dummy endoscope is synchronised with a visual representation of the procedure so as to provide a realistic simulation providing a useful training tool to endoscope users.

25 With an instrument such as an endoscope, the tip of the endoscope is manipulated by angulation control in the form of one or more control knobs on the handle of the endoscope which are linked to cables which extend down the insertion tube of the endoscope. Turning of the control knobs produces a corresponding movement of the cable and hence the tip. An endoscope can have two control knobs one of which controls the left/right movement of the tip and the other of which controls the up/down movement of the tip.

30 According to the present invention there is provided a dummy medical instrument for use in a simulator, the instrument comprising a control body with user manipulatable angulation control, an insertion tube and an umbilical extending from the

control body, wherein in a real instrument
corresponding to the one being simulated, at least one
angulation cable would extend from the user
manipulatable controls to the tip of the insertion
5 tube such that movement of the angulation control
changes the angulation of the tip, and wherein in the
dummy medical instrument the angulation cable extends
from the user manipulatable angulation control and
down the umbilical to a device for controlling the
10 resistance to movement of the cable to provide force
feedback simulating the force which would be felt at
the angulation control of a real instrument.

With this arrangement, force feedback is provided
15 to the angulation control whilst using the angulation
control and cable of the real instrument (albeit with
the cable being routed differently). This not only
provides a realistic feel, but also has the advantage
that fewer original components need to be designed for
20 the dummy instrument which also has benefits in terms
of supplying users with replacement parts.

In the real instrument, the cables extend away
from the angulation control in the direction along the
25 insertion tube. One option for the present invention
is to reroute the cables completely so that they
extend away from the angulation control in the
direction of the umbilical. However, the current
preference is for the cable to extend away from the
30 angulation control towards the insertion tube as in
the real body, and to be turned back on itself to
reroute it along the umbilical. There is limited
space available in the control body, and this approach
provides the best way of routing the cables without
35 interfering with other components in the control body.

Within the constraints of the normal instrument;

there is very little space available to turn the cable back on itself so that it is difficult to avoid generating undesirable friction which can distort the force feedback and cause premature wear of the cable.

5 Therefore, preferably the cable extends from the control body and around a pulley where it is turned through substantially 180° before being routed down the umbilical.

10 The use of the pulley eliminates sliding friction on the cable where it is turned back on itself. This provides not only smoother operation of the force feedback system, but also reduces the wear on the cable.

15 Preferably, the angulation cable is a co-axial cable in which a central wire is moveable within a sleeve. The sleeve is preferably removed for the portion of the cable surrounding the pulley, such that
20 the wire engages directly with the pulley.

When more than one angulation cable is used, each cable should be provided with its own pulley system. In one particularly advantageous arrangement, a first
25 cable is wrapped around a single pulley, while a second cable is wrapped around a pair of pulleys which are spaced apart so that the second cable forms a loop outside of the loop formed by the first cable.

30 In order to retain the cable on the pulley, the or each pulley preferably has a convex periphery, and at least a part of the periphery of the pulley is provided adjacent to the facing wall of a pulley housing.

35 An example of a dummy medical instrument constructed in accordance with the present invention

will now be described with reference to the accompanying drawings, in which:

Fig. 1 is a plan view of the angulation system;
5 and

Fig. 2 is a schematic perspective view showing the arrangement of pulleys, cables and angulation control.

10 The particular medical instrument being described here is an endoscope. However, it may be any medical instrument where cables which are normally manipulated to move a part of the instrument have to be rerouted so that force feedback can be applied to the cable.

15 The described arrangement is adapted from a conventional endoscope control body. Both of the real and dummy endoscopes have an insertion portion leading from the control body ending at the endoscope tip. In
20 the real instrument, this tip is manipulated to steer it through the colon. An umbilical is provided in both the real and dummy endoscopes leading from the control body to feed various cables to the control body.

25 The control body is provided with a pair of co-axial rotatable knobs 1,2 as shown in Fig. 2. The outer knob 1, in this case, would, in a normal endoscope, be rotated to move the tip in an up/down
30 direction, while the inner knob 2 would move the tip in a left/right direction orthogonal to the up/down direction. These described directions are only notional directions as, in use, the endoscope may be used in any orientation. Wrapped around each pulley
35 is a wire chain drive 3,4 to each of which a cable is attached. In the illustrated example there are four cables which, for convenience, are denoted up cable 5,

down cable 6, left cable 7 and right cable 8.

5 In a normal instrument, these cables 5,6,7,8 would extend all the way to the tip of the endoscope to provide the tip movement referred to above upon rotation of the knobs 1,2.

10 In the dummy instrument, these cables must be rerouted along the umbilical of the instrument which directs them to an angulation feedback controller. In the angulation feedback controller, the up/down cables 5,6 are connected to opposite sides of a force feedback motor and the left/right cable 7,8 are connected to a similar motor.

15 Rotation of the knobs 1,2 is detected and a system controller interprets this information together with information on the longitudinal and rotational positions of the tip of the endoscope. Using data
20 representing a simulated model of a colon, software detects when the simulated tip of the endoscope comes into contact with the simulated colon wall. At this time, the controller sends a force feedback signal to the two feedback motors which hence provides a
25 resistance to the movement of the cables 5-8 which is felt at the knobs 1,2 as a resistance to turning.

30 In order to route each cable into the umbilical 9, the arrangement shown in Fig. 1 and 2 is employed. Fig. 1 shows the rerouting of two of the cables, namely the down cable 6 and the right cable 8. A similar arrangement is provided on the opposite side of the control body as shown in Fig. 2. However, as
35 this has the same construction and operation as the down/right configuration shown in Fig. 1, only this configuration is described in detail. The right cable 8 is connected to the chain 4 that surrounds the inner

knob 2. This cable then extends around a first pulley
10 rotatably mounted on a housing 11 within the
control body. The pulley 10 turns the right cable
through 180°. A sheath 12 is connected to the housing
5 11. The cable 8 enters the sheath 12 at this point
and is guided within this sheath into the umbilical
which leads it to the feedback motor.

10 The down cable 6 passes in a loop outside the
right cable 8 around a pair of spaced pulleys 13,14
rotatably mounted on the housing 11. The down cable 6
enters a sheath 15 attached to the housing 11 at
connector 16 and is also guided into the umbilical to
15 the other force feedback motor as described with
reference to the right cable.

20

25

30

35

CLAIMS

1. A dummy medical instrument for use in a simulator, the instrument comprising a control body
5 with user manipulatable angulation control, an insertion tube and an umbilical extending from the control body, wherein in a real instrument corresponding to the one being simulated, at least one
10 angulation cable would extend from the user manipulatable controls to the tip of the insertion tube such that movement of the angulation control changes the angulation of the tip, and wherein in the
dummy medical instrument the angulation cable extends
15 down the umbilical to a device for controlling the resistance to movement of the cable to provide force feedback simulating the force which would be felt at the angulation control of a real instrument.
- 20 2. An instrument according to claim 1, wherein the cable extends from the control body and around a pulley where it is turned through substantially 180° before being routed down the umbilical.
- 25 3. An instrument according to claims 1 and 2, wherein the angulation cable is a co-axial cable in which a central wire is moveable within a sleeve.
- 30 4. An instrument according to claim 3, wherein the sleeve is removed for the portion of the cable surrounding the pulley, such that the wire engages directly with the pulley.
- 35 5. An instrument according to any one of the preceding claims, wherein more than one cable is provided.

6. An instrument according to claim 2 and claim 5,
wherein each cable has its own pulley system.

5 7. An instrument according to claim 6, wherein a
first cable is wrapped around a single pulley, while a
second cable is wrapped around a pair of pulleys which
are spaced apart so that the second cable forms a loop
outside of the loop formed by the first cable.

10 8. An instrument according to claim 2 or any one of
claims 3, 6 or 7 when dependent on claim 2, wherein
the or each pulley preferably has a convex periphery,
and at least a part of the periphery of the pulley is
provided adjacent to the facing wall of a pulley
15 housing.


20

25

30

1/2

FIG. 1.

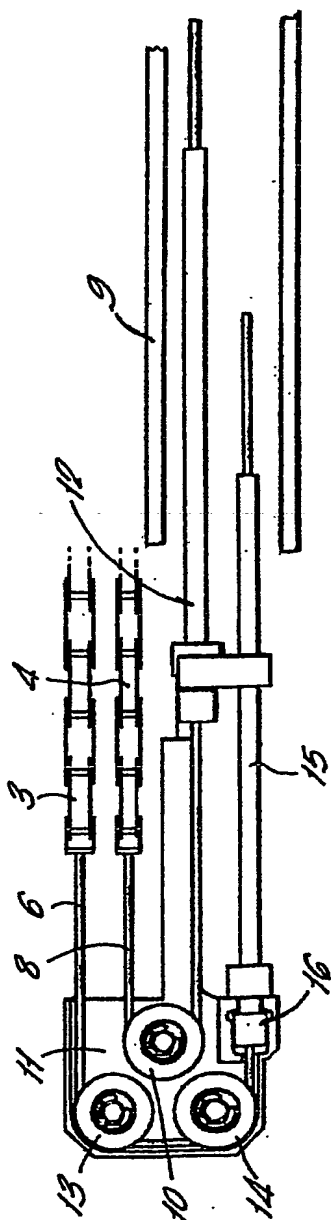

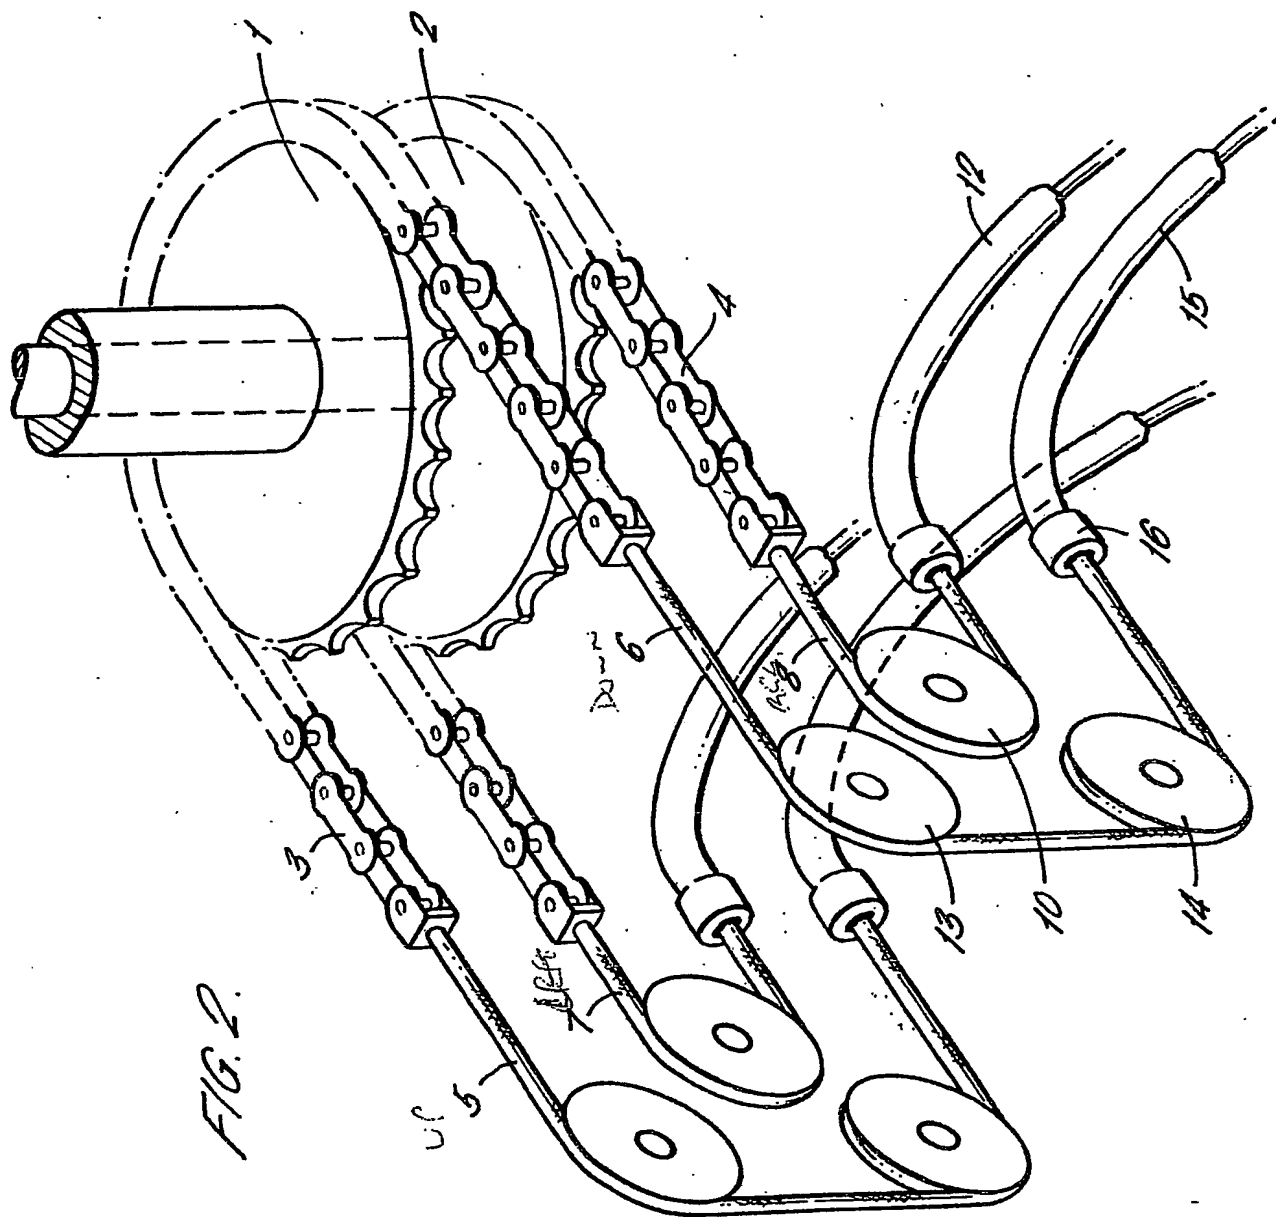


FIG. 2.

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.